


dimmer MPX-405

5231

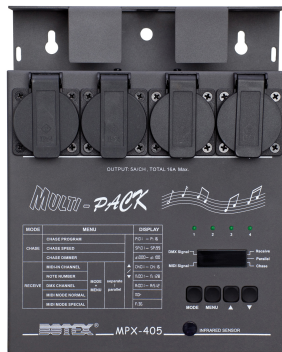

4 channels
DMX / MIDI
16 programs
single channel control

4 channel DMX / MIDI dimmer pack. It is equipped with 16 built-in programs and can control and dim up to 4 channels separately by DMX or MIDI. Additionally this case can be used in manual mode.

Features:

- Chaser function with 16 integrated programs
- Power failure memory



Power supply

Voltage	230V AC, 50/60Hz
Channel Output	6,3 A/CH; Max. 16 A

Connections

Current in	Schutzko
Current out	4x Schutzko
XLR in/out	3pol
Input 1	Midi in/thru

Controlling

Sound-to-Light	Yes
Dimming curve	Linear
Switch	No
Automatic	Yes
DMX512	Yes
Number of DMX channels	4

Hardware

Dimensions (L/W/H)	212 x 168 x 71 mm
Weight	3,80 kg